

NOTE: CASTING SHALL BE INSTALLED SO THAT THEY DO NOT CONTACT THE LATERAL OR LATERAL CAP.

20" VESTAL CASTING WITH 12" LID, LETTERED "SEWER CLEANOUT" WITH PENTAGONAL BOLT/LOCK

MINIMUM 1" & MAXIMUM 4" CLEARANCE FROM TOP OF CAP TO BOTTOM OF CASTING

TRACER WIRE


HDPE PIPE TO EXTEND MINIMUM 3" ABOVE STONE

6" PVC CAP

FINAL GRADE

20"Ø FRATCO HDPE METER PIT, 7.2 LBS/FT, MIN. 3' DEEP OR EQUAL

6" CLEARANCE FROM TOP OF PIPE TO TOP OF #8 STONE  
6" MINIMUM (TYP.)  
6" SDR35 PVC PIPE  
(6" X 6" X 6") TEE-WYE

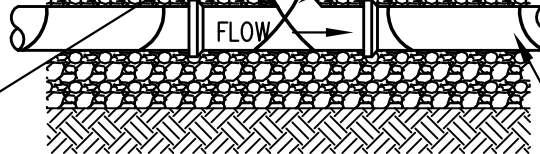

6" FROM TOP OF PIPE TO BOTTOM OF METER PIT. CONTRACTOR SHALL NOT ALLOW METER PIT TO CONTACT LATERAL/TEE-WYE CONCRETE CAP.

### CLEANOUT TYPE 3

(GRASS OR LANDSCAPE SURFACES BEYOND THREE FEET OF BUILDING)



*David A. Clark*



CLAY TOWNSHIP REGIONAL WASTE DISTRICT  
TYPE 3 CLEANOUT DETAIL

